

Super Fast Surface Mount Rectifiers
SMB(DO-214AA)

Features

- ROHS compliant
- Glass passivated chip
- High forward surge capability
- Meet MSL level 1, per J-STD-020
LF maximum peak of 250 °C
- Solder dip 260 °C / 40S
- Component in accordance to ROHS 2002/95/EC and WEEE 2002/96/WC
- UL recognition, file number E342874


Primary characteristics

$I_{F(AV)}$	2A
V_{RRM}	50V to 600V
I_{FSM}	50A
I_{RM}	10uA
V_{FM} at $I_F=2A$	0.95/1.3/1.7V
T_J max.	150 °C

Applications

Ideal for ac-to-dc bridge full wave rectification such as SMPS, home appliances, office equipment, industrial automation applications

Mechanical data

- SMB(DO-214AA)
- Epoxy meets UL 94 V-0 flammability rating
- Terminals: Tin plated leads.
- Polarity: As marked.
- Mounting Torque:10cm·kg(8.8 inches·lbs)max.
- Recommended Torque:5.7 cm·kg(5 inches·lbs)

Maximum rating (Ta=25°C unless otherwise noted)

Parameter	Sym	SMB(DO-214AA)							Unit
		ES2A	ES2B	ES2C	ES2D	ES2F	ES2G	ES2J	
Max. repetitive peak reverse voltage	V_{RRM}	50	100	150	200	300	400	600	V
Max. RMS reverse voltage	V_{RMS}	35	70	105	140	210	280	420	V
Max. DC blocking voltage	V_{DC}	50	100	150	200	300	400	600	V
Max. average forward current	$I_{F(AV)}$	2							A
Non-repetitive peak forward surge current 8.3ms single half-sine-wave	I_{FSM}	50							A
Max. instantaneous forward voltage drop per diode	V_{FM}	0.95			1.3		1.7		V
Max. instantaneous reverse current at rated DC blocking voltage	I_{RM}	10							μA
		100							
Operating junction temperature	T_J	-55 ~ +150							°C
Storage temperature	T_{STG}	-55 ~ +150							°C
Maximum reverse recovery time (Note1)	t_{rr}	35							nS
Typical thermal resistance (Note2)	R_{J-A}	75							°C/W
	R_{J-L}	25							°C/W

Notes:

1 Reverse Recovery Test Conditions: $I_F=0.5A$, $I_R=1.0A$, $IRR=0.25A$





2 The thermal resistance from junction to ambient, case or mount, mounted on P.C.B with 5x5mm copper pads, 2 OZ, FR4 PCB




Ordering information (Example)

PREFERRED	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
ES2A				

Typical characteristics

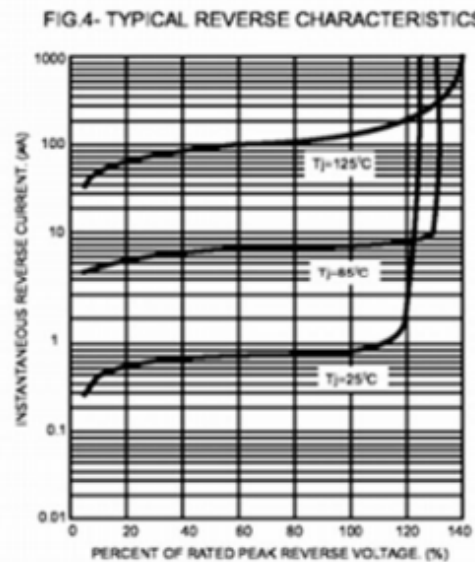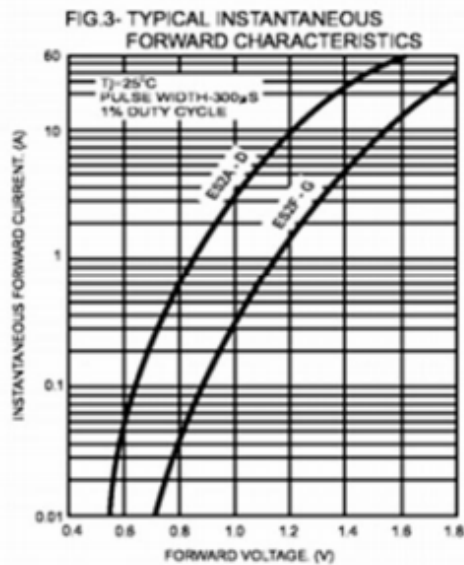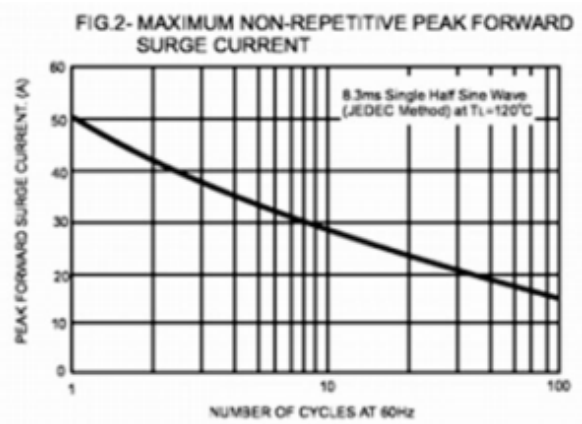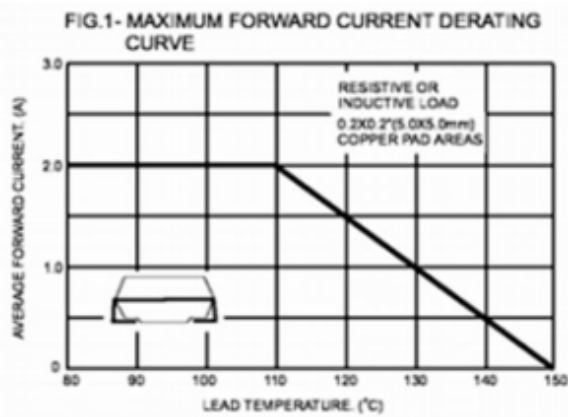

Package outline dimensions

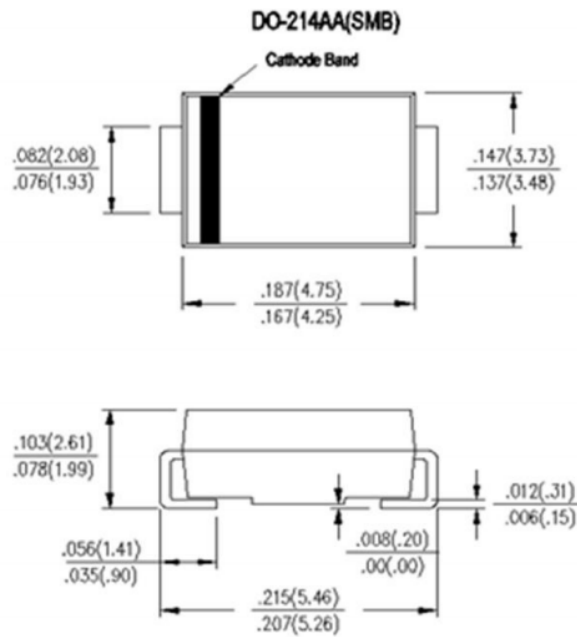

Golden SEMI Inc. - Legal Notice

Disclaimer – All data and specifications are subject to changes without notice

GOLDEN SEMI Inc, it's affiliates, agents, distributors and employees neither accept nor assume any responsibility for errors or inaccuracies. All data and specifications are intended for information and provide a product description only. Electrical and mechanical parameters listed in GOLDEN SEMI data sheets and specifications will vary dependent upon application and environmental conditions . GOLDEN SEMI is not liable for any damages occurred or resulting from any circuit, product or end-use application for which it's products are used. GOLDEN SEMI products are not intended or designed for use in life saving or sustaining apparatus and purchase of any GOLDEN SEMI products automatically indemnifies GOLDEN SEMI against any claims or damages resulting from application malfunction