



<b>DO-41</b>		<b>Features</b>					
		<ul style="list-style-type: none"> <li>● Metal-Semiconductor junction with guardring</li> <li>● Epitaxial construction</li> <li>● Low forward voltage drop</li> <li>● High current capability</li> <li>● Moisture sensitivity: level 1, per J-STD-020</li> <li>● AEC-Q101 qualified</li> <li>● High temperature soldering guaranteed: 260°C/10 seconds</li> <li>● Halogen-free according to IEC 61249-2-21 definition</li> </ul> <div style="text-align: right; margin-top: 10px;">  </div>					
<b>Primary characteristics</b>		<b>Applications</b>					
$I_{F(AV)}$	1A	For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications					
$V_{RRM}$	20V to 60V						
$I_{FSM}$	40A						
$I_{RM}$	0.5mA						
$V_{FM}$ at $I_F=1A$	0.5/0.7V						
$T_J$ max.	150 °C						
		<b>Mechanical data</b>					
		<ul style="list-style-type: none"> <li>● DO-41</li> <li>● Epoxy meets UL 94 V-0 flammability rating</li> <li>● Terminals: Tin plated leads.</li> <li>● Polarity: As marked.</li> </ul>					
<b>Maximum rating (Ta=25°C unless otherwise noted)</b>							
Parameter	Sym	DO-41					Unit
		SB120	SB130	SB140	SB150	SB160	
Max. repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	V
Max. RMS reverse voltage	$V_{RMS}$	14	21	28	35	42	V
Max. DC blocking voltage	$V_{DC}$	20	30	40	50	60	V
Max. average forward current	$I_{F(AV)}$	1					A
Non-repetitive peak forward surge current 8.3ms single half-sine-wave	$I_{FSM}$	40					A
Max. instantaneous forward voltage drop per diode	$V_{FM}$	0.5			0.7		V
Max. instantaneous reverse current at rated DC blocking voltage	Ta=25 °C	0.5					mA
	Ta=125 °C	10					
Operating junction temperature	$T_J$	-55 ~ +150					°C
Storage temperature	$T_{STG}$	-55 ~ +150					°C
Typical thermal resistance (Note1)	$R_{\theta J-L}$	15					°C/W

**Notes:**





1 The thermal resistance from junction to lead

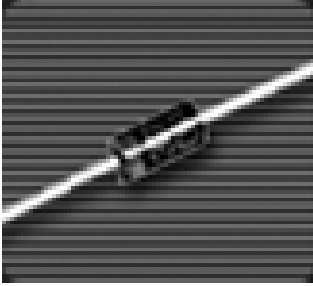

**Ordering information (Example)**

PREFERRED	UNITWEIGHT(g)	PREFERREDPACKAGECODE	BASEQUANTITY	DELIVERYMODE
SB120				


**Typical characteristics**

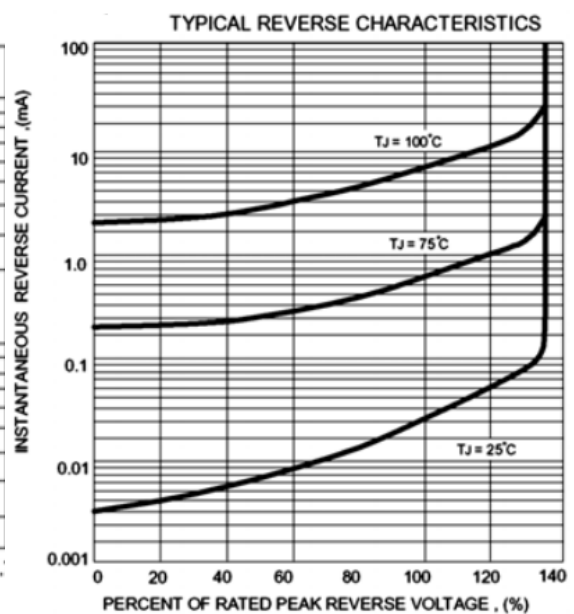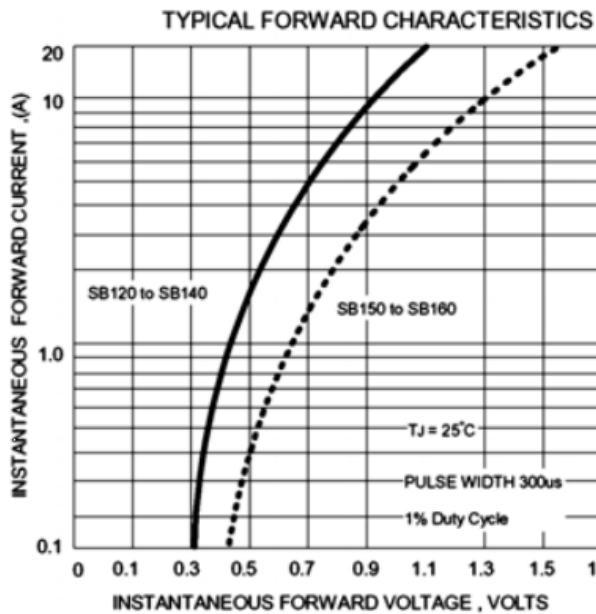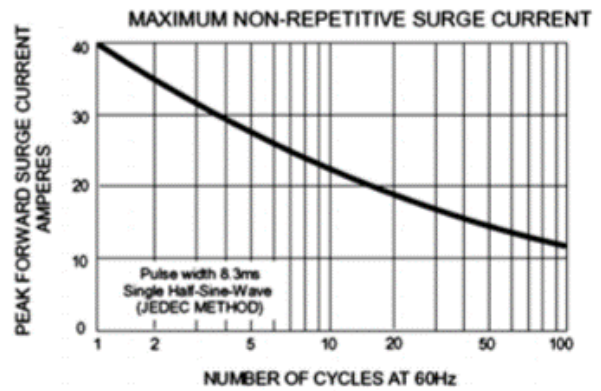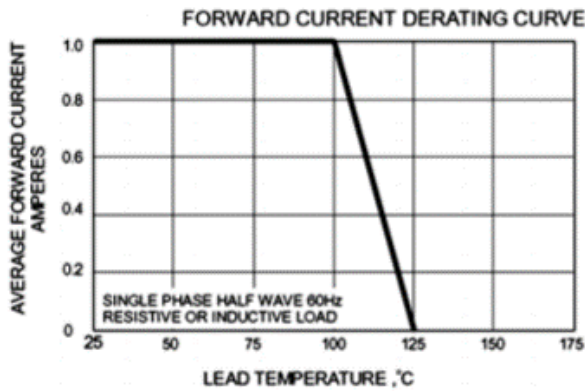



**Package outline dimensions**

**DO-204AL (DO-41)**

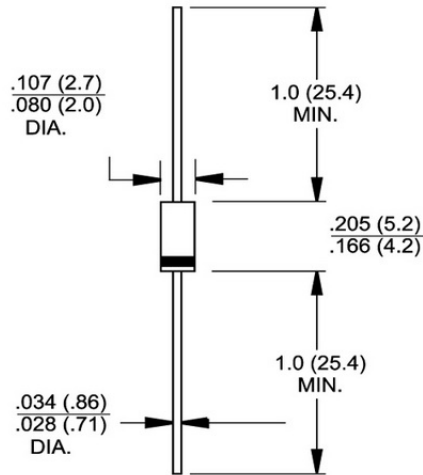

**Dimensions in inches and (millimeters)**

**Gold SEMI Inc. - Legal Notice**

Disclaimer – All data and specifications are subject to changes without notice

GOLD SEMI Inc, it's affiliates, agents, distributors and employees neither accept nor assume any responsibility for errors or inaccuracies. All data and specifications are intended for information and provide a product description only. Electrical and mechanical parameters listed in GOLD SEMI data sheets and specifications will vary dependent upon application and environmental conditions .GOLD SEMI is not liable for any damages occurred or resulting from any circuit, product or end-use application for which it's products are used. GOLD SEMI products are not intended or designed for use in life saving or sustaining apparatus and purchase of any GOLD SEMI products automatically indemnifies GOLD SEMI against any claims or damages resulting from application malfunction